



WFAE-55F and WFAE-55FS High Production Open Auto Lift Fryers are engineered to meet today's high quality food service standards. These fryers give the user the highest production available in the industry today, while only requiring 4.9 square feet of floor space and use up to 25% less oil than similar models.

Features

- **Automatic Oil Temperature Control** ensures precise temperatures to produce consistent high quality products while minimizing energy consumption.
- **Flat bar elements**, located below the basket, are heavy-duty stainless steel with a low watt density for longer oil life.
- **The solid state control** on the **WFAE-55FS** incorporates a seven key programmable time and temperature menu.
- **Repeat cycle timer** activates using one push button operation.
- **Filtration system and use of filter powder**, will substantially increase oil life while reducing labor.
- **Automatic basket lift cradle** raises basket above oil at end of timed cook cycle, maximizing handling safety.
- **Frypot** is constructed of stainless steel and robotically welded for durability.
- **Fryers** are Underwriters Laboratories, Inc. LISTED and meet NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

Specifications

Overall Dimensions:	Inches	MM
Width	15 11/16	398
Depth	37 5/16	964
Height (incl. 4" legs)	45 11/16	1160
Oil Capacity:	Lbs.	KG
WFAE-55F/FS	55	25
Typical Production:	Lbs.	KG
Chicken <i>frozen</i>	25*	11
Chicken <i>fresh</i>	33*	15
*With standard basket only		
Weights:	Lbs.	KG
Installed	212	96
Shipping	262	119

EZ Company
PO Box 273
Dayton, VA 22821
Phone: (540) 867-9211
Fax: (540) 867-0001

Accessories / Options

Filter Powder, 1007N
Rear Leg Kit, 22692
Half-Size Baskets Available


EZ Company

**WFAE-55F, WFAE-55FS
OPEN FRYER**



DIMENSIONS:

$\frac{\text{INCH}}{\text{(MM)}}$

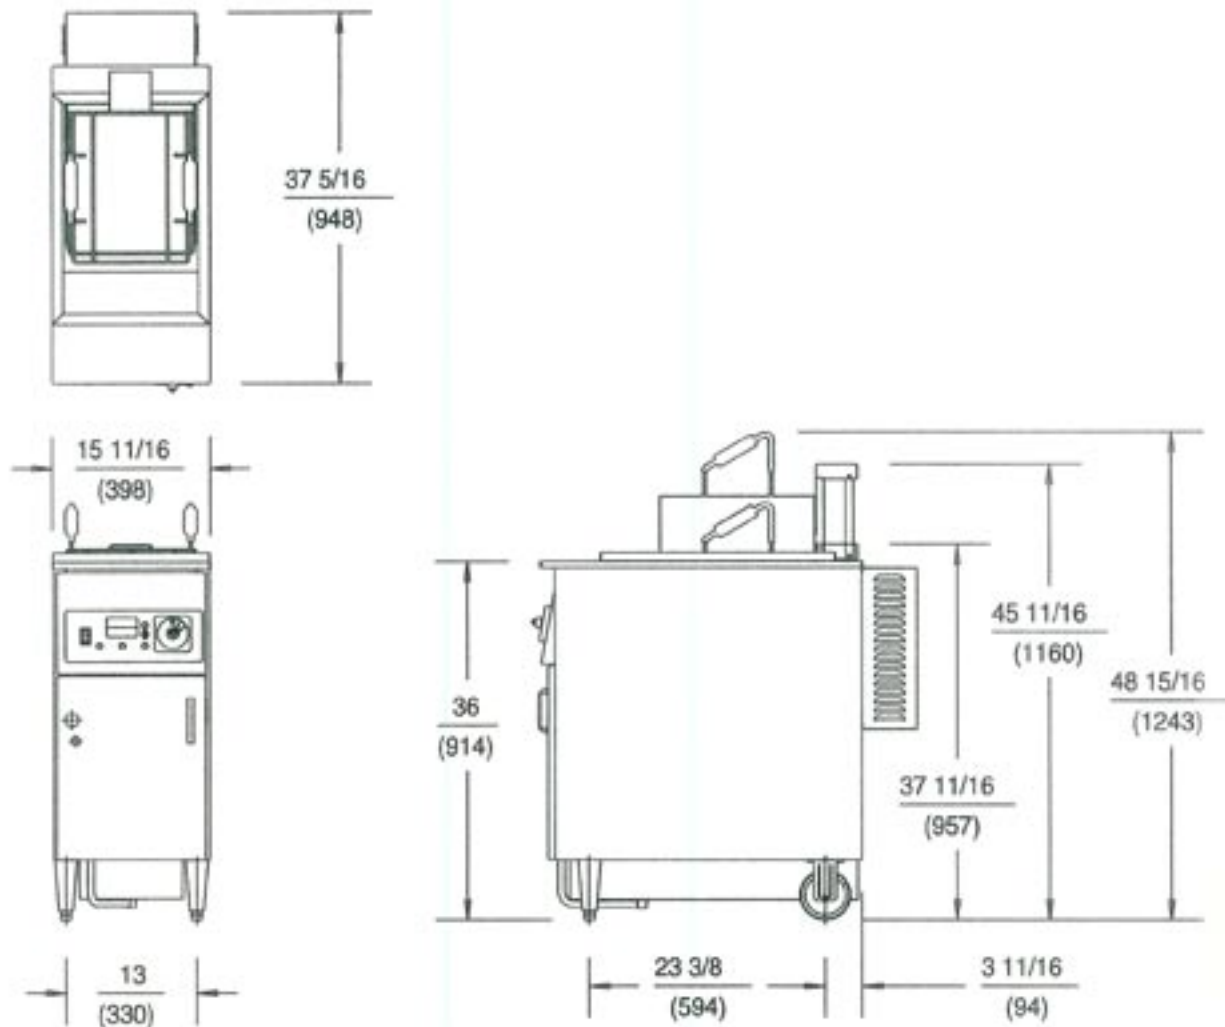

WFAE-55F ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
WFAE-55F	208	17000	47.2	47.2	47.2	NA	NA	NONE
WFAE-55F	240	17000	41.0	41.0	41.0	NA	NA	NONE
WFAE-55FEU	380-415	17000	26.0	24.0	24.0	3.0	NA	NONE

All models with an 'S' suffix have the same electrical specifications as the standard units.
NOTE: Specifications subject to change without notice